


10 CHANNELS POWER ADAPTER

INSTRUCTION MANUAL



1. Product characteristic

1. The design of charge mode is "constant flow", which is charging for the constant flow when storage battery voltage is lower than preset value. When the storage battery voltage is higher than preset value, charging current will be decreased as the battery voltage increases.
2. High working efficiency, protect battery better.
3. Perfect protection function: avoid over charge, avoid over flow, greatly reduce the heating from the invalid charging battery.
4. Metal paint process case, convenient installation and operation.

2. Safety instructions

- ◆ Follow all instructions in this instruction manual.
- ◆ Do not place the product near any heat sources such as radiators, stoves, or other devices that produce heat. If you are not going to use the product for a long time, pull out the battery. Do not throw or drop the product in case it causes severe damages.
- ◆ Be aware of the supply voltage. Only the supply voltage listed on the instruction manual fits the product.
- ◆ Only use accessories specified by our company.
- ◆ Never open the device. If devices are opened by customers in breach of this instruction, the warranty becomes null and void. Turn to the professional mechanic or local dealer for help if there is something wrong with the product.
- ◆ If components are needed to be replaced, replace them with original components produced by our company.
- ◆ Leave the devices the minimum space of 30 mm for proper ventilation.
Do not cover the vent with newspapers, cloths, curtains, etc.
Do not place the devices near fire or water.
Only professional mechanic can assemble the devices if it is labeled with hazard warning sign “⚡”.
Recycle the replaced battery.
The devices can be used in tropical or temperate regions.
The devices can only be used in the area with an altitude of below 2,000 meters.




3.Operation function and diagram

1.The scope of application


Designed with 10 output charge ports, can support 10 units to charge the lithium battery simultaneously.

2.Function description

The front panel of the charger

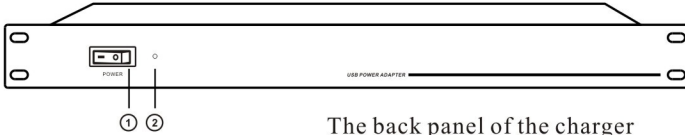

The back panel of the charger

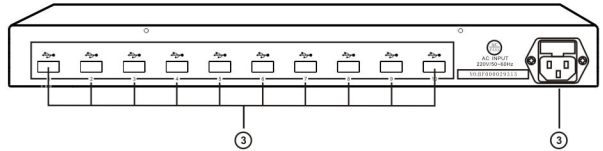

① power switch ② power indicated lamp ③ USB charging interface ④ DC power socket

3. operation steps

Use USB line connect with the USB interface which is in the back of the meeting base and USB interface charger back of the charger(Figure 1)

The charger is connected to the power supply, turn on the power switch, the power light is on. Light ring will flash when charging (Figure two);

when the battery indicator light stops flashing it means that charging is complete (Figure three)

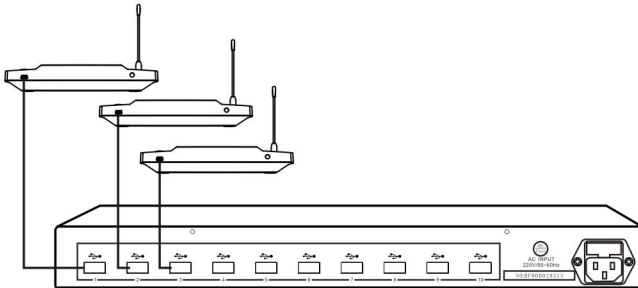


Figure one

4. Product parameters

Input voltage: AC 100-240V 50Hz/60Hz

Power: 50W

The maximum current: 10A

Output voltage: 5V

This operation manual would be revised at any time without prior notice.

This manual contains needed information as much as possible. If there is anything unclear, wrong or omitted, please don't hesitate to contact us for confirmation. The company is free from all the damage and loss caused by no confirmation.

For testing and maintenance, please contact us or our authorized distributors through the dealer from whom you purchased this product. The company assumes no responsibility for any loss or damage resulting from testing and maintaining this unit by unqualified personnel.